



RESERVOIR - FRAME MOUNTED. PLAN VIEW AND COVER ASSEMBLY

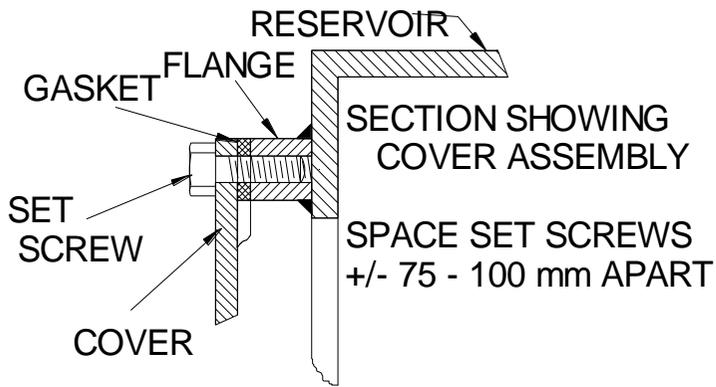

METHOD OF ATTACHING CLEANING COVERS

NOTE:-
RESERVOIRS TO HAVE TWO LEVEL SWITCHES,
THE UPPER UNIT WILL TRIGGER AN ALARM
FOR DANGER LOW FLUID LEVEL.
THE LOWER LEVEL SWITCH WILL
TRIP THE ELECTRIC MOTOR

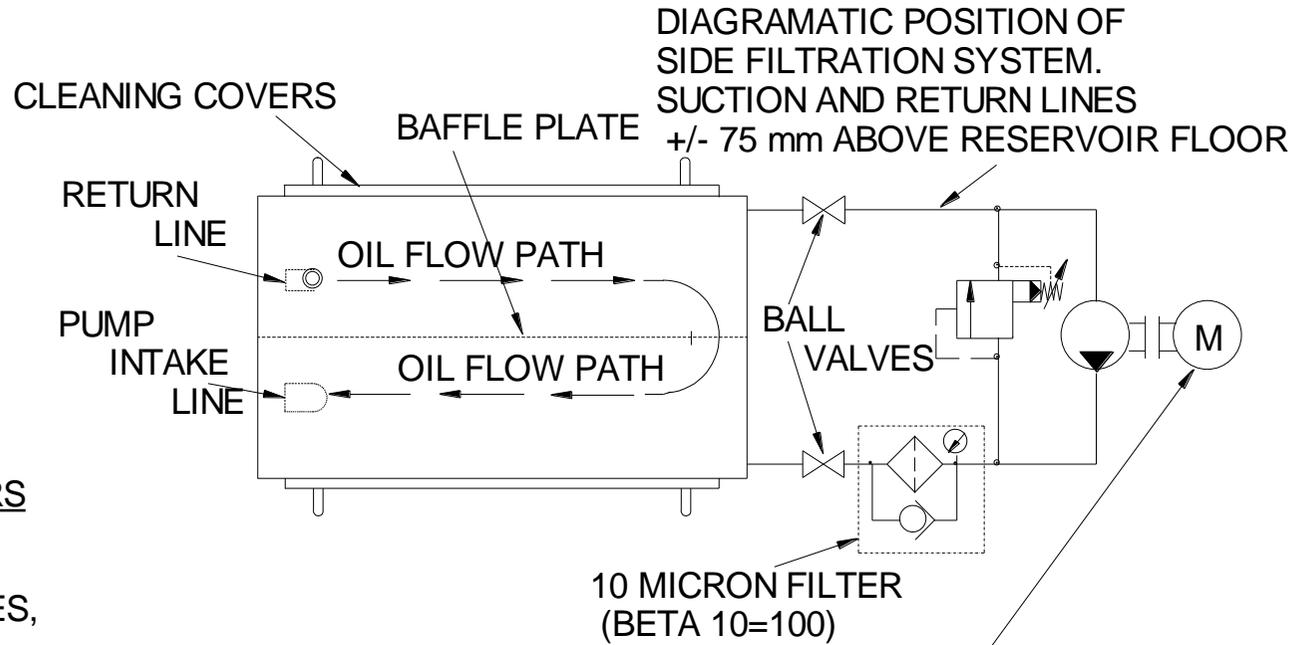

SILICONE SEALER TO BE
USED ON THE GASKET.
USE AN OIL CLOTH TO WIPE
AN OIL FILM ON THE FLANGE
FOR EASE OF COVER REMOVAL

SIZE THE SIDE FILTRATION PUMP
TO BE AT LEAST 10% OF THE RESERVOIR
CAPACITY IN LITRES PER MINUTE.
i.e. 500 LITRE RESERVOIR WITH A
50 LITRE PER MINUTE PUMP.